


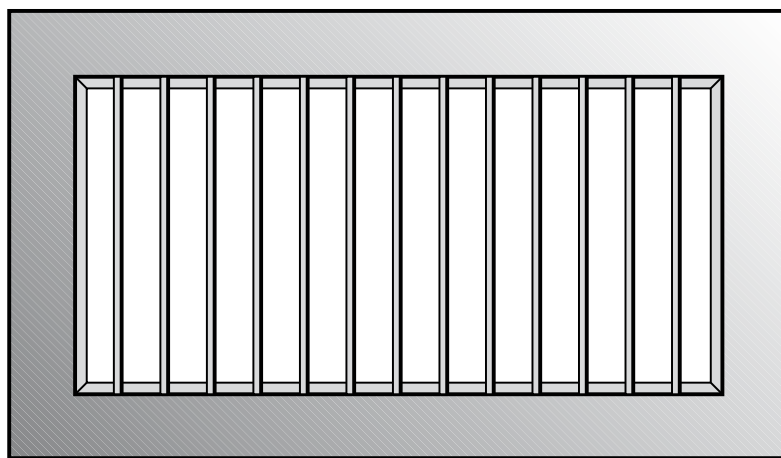


Contents: *(click on page links*

 <i>below)</i> General Data	1
Performance Data	3
Suggested Spec	8
Accessories	9

Supply Air

SINGLE DEFLECTION GRILLE

Series 580, 585

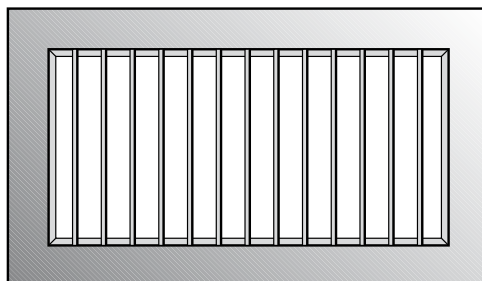

General

Single deflection supply air grilles include adjustable deflection vanes providing air pattern control in either the horizontal or vertical plane. These grilles are primarily used in high sidewall applications where their high capacity and long throw capability enables them to provide air distribution across large open rooms, such as supermarkets, warehouses, factories, etc. Grilles are available with 10 mm or 20 mm vane spacings and have a flat surface mounting frame.

Design

Air pattern control in a single plane is provided by a single set of vanes, each vane individually adjustable at the face of the grille, without tools. Grilles can be specified with the vanes horizontal or vertical.

Performance Data

Performance data is applicable to either double or single deflection vane core designs without OBD. Throws are given for a terminal velocity of 0.25 m/s at 0°, 22.5° and 45° vane settings. Note: For any given outlet size and volume, the values of throw, total pressure and sound levels will differ at each vane setting.

Sizes (mm)

Available square or rectangular

Minimum Nominal (hole) size : 100 mm x 100 mm

Maximum Nominal (hole) size : 1800 mm x 1200 mm

Standard size increment : 25 mm width or height

When ordering, specify
nominal width followed
by nominal height:

e.g. 500 mm wide x 200 mm high

Finishes

Standard finish is gloss powder coat. Alternative colours and finishes are available.

Construction


Frame and vanes are of corrosion resistant aluminium construction.

Accessories

Optional accessories include opposed blade dampers (OBD), square-to-round (SRA) ducting adaptors.

Dimensions (mm)**SINGLE DEFLECTION GRILLE**

Model	Vane Position	Vane Spacing
580 H	horizontal	20 mm
580 V	vertical	20 mm
585 H	horizontal	10 mm
585 V	vertical	10 mm

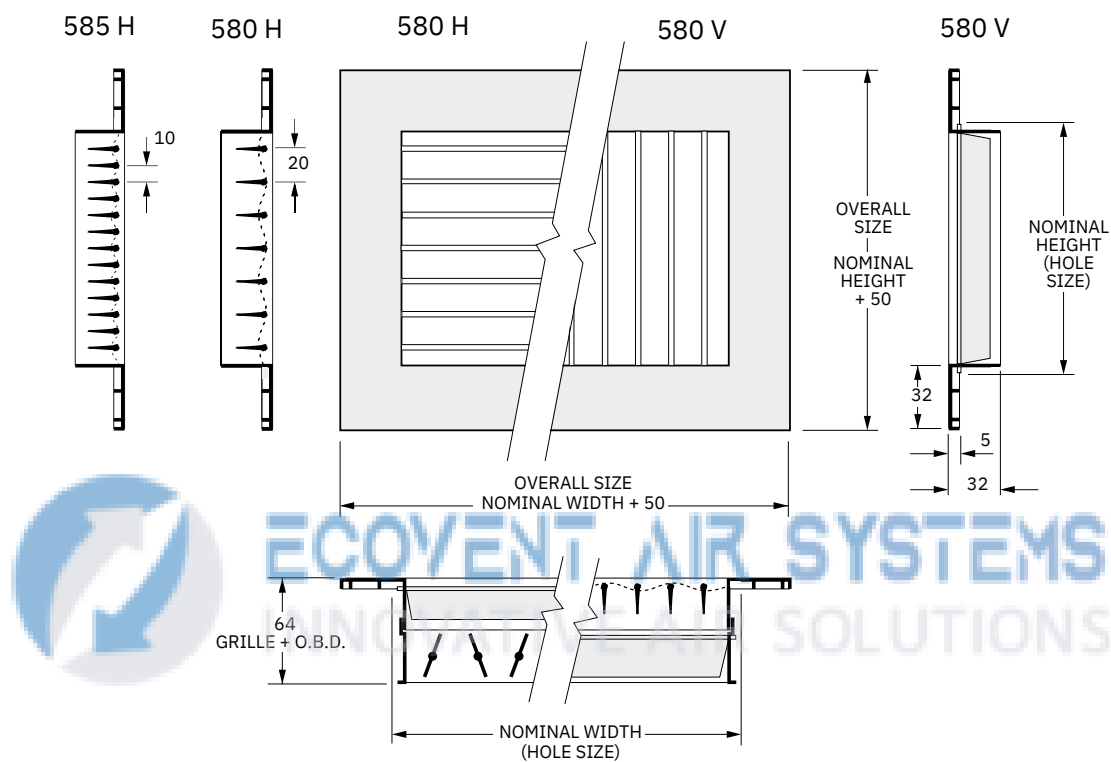Series 580, 585 H or V

Performance Data

SINGLE & DOUBLE DEFLECTION GRILLE

5880, 580, 56880

2

Nominal Size (mm) (W x H)	Neck Velocity m/s	1.5	2.0	2.5	3.0	3.5	4.0	5.0	6.0	8.0	9.0																				
	Vel. Press. Pa	0.5	2.0	3.0	5.0	7.0	9.0	14.0	20.0	32.0	41.0																				
200 x 100	Volume l/s	24	30	40	48	56	64	80	95	128	145																				
	Deflection °	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45									
	Total Press. Pa	4	5	6	8	8	10	9	10	13	15	17	22	24	26	34	34	38	50	46	51	68	60	68	88	112	128	168	125	138	188
	Throw m	3.3	3.1	2.0	3.7	3.4	2.4	4.3	4.0	2.8	5.8	4.9	3.7	6.6	5.9	4.1	7.8	6.9	4.7	9.2	8.5	5.5	10.7	9.8	6.4	14.3	12.2	8.5	15.3	12.8	8.8
150 x 150	Volume l/s	29	38	48	57	66	76	95	114	150	170																				
	Deflection °	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45									
	Total Press. Pa	4	5	7	5	6	7	9	10	13	14	15	20	20	29	45	23	25	33	35	38	51	55	60	80	92	98	138	112	122	163
	Throw m	3.4	3.1	2.1	3.9	3.5	2.5	4.6	4.3	2.8	5.9	5.0	3.2	7.3	6.1	4.6	7.9	7.0	4.9	9.5	8.2	5.8	11.6	9.8	7.0	14.3	12.5	9.2	15.0	13.1	9.8
200 x 125	Volume l/s	40	50	65	80	90	104	125	150	195	230																				
	Deflection °	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45									
	Total Press. Pa	3	4	5	6	7	9	13	14	19	18	19	26	21	23	34	30	32	42	35	38	53	60	65	90	100	105	150	137	150	222
	Throw m	3.7	3.2	2.4	4.6	4.0	2.7	5.8	5.2	3.7	7.3	6.4	4.8	8.2	7.0	4.9	9.9	8.4	6.0	10.4	8.8	6.4	12.8	11.3	8.2	15.2	13.4	10.4	16.2	14.0	11.5
200 x 200	Volume l/s	50	70	90	105	120	140	175	210	280	315																				
	Deflection °	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45									
	Total Press. Pa	4	4	5	9	11	13	13	15	19	18	19	24	21	23	30	30	33	43	48	53	68	69	75	95	114	125	163	144	159	207
	Throw m	3.9	3.4	2.4	5.8	5.2	3.4	7.3	6.4	4.4	8.7	7.5	5.3	9.2	7.9	5.8	10.3	8.8	6.7	13.4	11.9	8.5	15.3	13.1	10.7	16.2	14.3	11.0	18.3	15.1	12.2
300 x 125	Volume l/s	60	80	100	120	140	160	200	240	320	360																				
	Deflection °	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45									
	Total Press. Pa	4	4	5	7	8	11	12	13	17	15	16	21	21	23	30	28	31	41	43	46	63	60	65	85	110	118	157	139	149	198
	Throw m	4.3	3.7	2.8	6.1	5.2	3.7	7.3	6.4	4.6	8.2	7.3	5.2	9.5	8.5	6.1	10.9	9.3	7.0	13.4	11.6	8.8	15.0	13.4	10.1	17.0	15.2	11.8	20.1	16.8	13.4
250 x 200	Volume l/s	70	90	110	130	155	175	220	265	350	395																				
	Deflection °	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45									
	Total Press. Pa	4	5	6	7	8	11	12	13	16	14	15	20	20	21	28	26	28	37	41	45	60	56	60	80	92	100	132	130	136	182
	Throw m	4.6	4.0	3.0	5.5	4.9	3.4	7.9	6.7	4.8	8.2	7.3	5.5	9.5	8.5	6.4	11.6	10.7	7.0	13.4	11.9	9.5	15.3	13.1	10.0	19.8	17.0	12.8	20.8	19.8	14.3

Note: Throw value given is for a terminal velocity of 0.25 m/s.

4

5880, 580, 56880

Nominal Size (mm) (W x H)	Neck Velocity m/s	
	Vel.	Press. Pa
0.5	1.5	2.0
	2.0	2.5
2.0	3.0	3.5
	4.0	5.0
5.0	6.0	8.0
	9.0	14.0
14.0	20.0	32.0
	41.0	

250 x 250 300 x 200 400 x 150 500 x 125 650 x 100	Volume l/s	85	110				145				170				195				225				280				340				450				500			
		Deflection °		0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45					
		Total Press. Pa		4	5	5	7	8	11	10	12	15	15	16	21	21	23	28	26	28	38	42	46	61	58	61	83	80	85	112	128	138	188					
		Throw m		4.7	4.1	3.1	6.6	5.6	4.1	7.9	7.0	5.2	9.6	8.4	6.0	11.1	9.9	7.5	12.2	11.0	8.5	14.0	13.1	10.1	16.6	15.0	11.3	20.7	18.6	13.4	21.7	20.1	14.3					
		N.C.		< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 30	< 30	< 30	< 30	< 30	< 30	< 35	< 35	< 40	< 40	< 40	< 50	< 50	< 50	< 50	< 60	< 60						
300 x 250 500 x 150 600 x 125 750 x 100	Volume l/s	100	135				170				200				240				270				340				410				540				610			
		Deflection °		0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45					
		Total Press. Pa		4	5	6	6	7	9	9	10	13	14	15	20	19	21	27	25	28	38	38	40	52	60	64	80	100	112	152	128	143	194					
		Throw m		5.2	4.3	3.4	6.9	5.6	4.4	8.4	7.5	5.6	9.5	8.5	6.7	11.4	10.0	7.8	12.8	11.0	8.2	15.3	13.3	10.2	18.3	15.9	12.8	21.4	18.3	15.3	22.2	19.2	15.7					
		N.C.		< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 30	< 30	< 30	< 30	< 30	< 35	< 35	< 35	< 40	< 40	< 40	< 50	< 50	< 50	< 60	< 60	< 60						
300 x 300 350 x 250 450 x 200 600 x 150	Volume l/s	125	165				205				245				290				330				410				490				655				740			
		Deflection °		0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45					
		Total Press. Pa		3	4	5	6	7	9	10	11	13	14	16	20	18	20	26	25	27	36	38	43	58	49	54	73	98	106	142	126	136	181					
		Throw m		5.5	4.9	3.7	7.3	6.4	4.9	9.0	7.8	5.9	10.1	8.9	7.0	11.9	10.4	8.1	13.4	11.9	9.2	16.2	14.6	10.5	18.6	16.2	12.2	22.9	18.6	16.0	24.1	19.7	16.5					
		N.C.		< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 30	< 30	< 30	< 30	< 30	< 35	< 35	< 35	< 40	< 40	< 40	< 40	< 50	< 50	< 50	< 60	< 60	< 60						
350 x 300 400 x 250 500 x 200 700 x 150	Volume l/s	145	195				240				290				340				390				485				580				775				875			
		Deflection °		0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45					
		Total Press. Pa		4	4	5	6	7	9	10	10	13	14	15	19	19	20	26	25	26	34	38	41	53	53	58	75	99	103	134	126	131	171					
		Throw m		5.5	4.9	3.7	7.6	7.0	5.5	9.0	8.5	6.4	10.2	9.3	7.5	11.7	10.8	8.4	14.1	12.3	10.5	16.2	14.5	11.5	18.9	16.8	12.4	24.0	20.4	16.3	25.9	22.0	16.8					
		N.C.		< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 30	< 30	< 30	< 30	< 30	< 30	< 40	< 40	< 40	< 40	< 50	< 50	< 50	< 50	< 60	< 60	< 60	< 60							
350 x 350 400 x 300 500 x 250 600 x 200 850 x 150	Volume l/s	170	230				285				340				400				455				570				685				900				1 025			
		Deflection °		0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45					
		Total Press. Pa		4	4	5	6	8	9	10	11	13	13	15	19	20	23	30	26	29	37	36	40	53	52	58	77	90	100	132	116	129	171					
		Throw m		6.1	5.8	4.6	8.1	7.2	6.6	9.5	8.5	7.3	11.1	9.9	8.4	13.1	11.3	10.1	14.8	12.8	10.9	17.0	15.0	12.5	20.1	18.3	14.1	25.2	21.4	16.8	27.2	23.1	17.7					
		N.C.		< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 30	< 30	< 30	< 30	< 35	< 35	< 35	< 35	< 35	< 40	< 40	< 40	< 40	< 50	< 50	< 50	< 60	< 60	< 60						
400 x 400 450 x 350 550 x 300 650 x 250 800 x 200	Volume l/s	225	300				375				450				530				600				750				900				1 200				1 350			
		Deflection °		0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45	0	22.5	45					
		Total Press. Pa		4	4	5	6	7	10	10	11	14	15	17	22	18	20	27	26	28	38	41	44	60	59	63	86	104	112	152	132	142	192					
		Throw m		7.3	5.9	4.8	9.8	8.5	6.7	11.6	10.4	8.5	13.7	12.5	9.8	14.3	13.4	10.0	16.2	15.0	11.6	18.6	17.4	13.4	22.3	18.9	14.5	27.2	23.1	17.7	29.8	25.3	19.4					
		N.C.		< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 20	< 30	< 30	< 30	< 30	< 30	< 30	< 30	< 30	< 35	< 35	< 35	< 35	< 40	< 40	< 40	< 40	< 50	< 50	< 60	< 60	< 60	< 60					

Note: Throw value given is for a terminal velocity of 0.25 m/s.

Performance Data

SINGLE & DOUBLE DEFLECTION GRILLE

5880, 580, 56880

Nominal Size (mm) (W x H)	Neck Velocity m/s	1.5	2.0	2.5	3.0	3.5	4.0	5.0	6.0	8.0	9.0
Vel. Press. Pa	0.5	2.0	3.0	5.0	7.0	9.0	14.0	20.0	32.0	41.0	

500 x 350 600 x 300 700 x 250 900 x 200 1200 x 150	Volume l/s	245	330	410	490	575	655	820	985	1 310	1 475
		Deflection °	0	22.5	45	0	22.5	45	0	22.5	45
		Total Press. Pa	4	5	5	6	9	10	12	16	15
		Throw m	7.6	6.0	4.8	10.0	8.9	6.9	11.7	10.8	8.0
450 x 450 500 x 400 800 x 250 1000 x 200	Volume l/s	285	380	480	575	670	765	955	1 145	1 530	1 720
		Deflection °	0	22.5	45	0	22.5	45	0	22.5	45
		Total Press. Pa	4	4	6	6	7	9	10	11	15
		Throw m	7.6	6.1	4.9	10.0	8.9	6.9	11.9	10.4	6.4
500 x 500 550 x 450 700 x 350 850 x 300 1000 x 250	Volume l/s	360	475	600	720	840	960	1 200	1 440	1 920	2 160
		Deflection °	0	22.5	45	0	22.5	45	0	22.5	45
		Total Press. Pa	4	4	5	6	7	9	10	11	14
		Throw m	7.8	7.0	5.2	11.0	9.2	7.0	14.0	11.6	8.5
700 x 450 800 x 400 900 x 350 1000 x 300 1250 x 250	Volume l/s	450	600	750	900	1 050	1 200	1 500	1 800	2 400	2 700
		Deflection °	0	22.5	45	0	22.5	45	0	22.5	45
		Total Press. Pa	4	5	6	7	9	10	11	13	15
		Throw m	7.9	7.0	6.1	11.6	9.8	7.9	14.6	12.5	9.5
600 x 600 900 x 400 1200 x 300 1450 x 250 1800 x 200	Volume l/s	500	670	850	1 020	1 120	1 360	1 700	2 040	2 720	3 060
		Deflection °	0	22.5	45	0	22.5	45	0	22.5	45
		Total Press. Pa	4	4	5	6	7	8	9	11	13
		Throw m	8.2	7.3	6.4	10.7	9.5	7.9	14.9	12.2	9.5

Note: Throw value given is for a terminal velocity of 0.25 m/s.

GRILLES & DIFFUSERS

PERFORMANCE DATA

The data in the Performance Tables was obtained from tests conducted in accordance with ISO Standard 5219, ISO Standard 3741 and ADC Test Code 1062 GRD84.

Additional performance details are included, where applicable, within each product section.

For performance data beyond the tables' range, consult your nearest temperzone sales office.

Definitions:

Core Area (m²)

The total plane area within the frame opening through which air passes.

Isothermal Air

Air with a nil temperature difference between primary (supply) air and secondary (room) air.

Neck Velocity (m/s)

Neck Velocity = Volume (flow rate) ÷ Neck Core Area.

Measured in metres per second at the neck - the point where the grille/diffuser attaches to the duct.

Noise Criteria (NC)

The Noise Criteria (NC) system curves define the limits which the octave band spectrum of a continuous noise source must not exceed to achieve compliance with the design goal and a level of occupant acceptance.

Standard (Dry) Air

Density of 1.2 kg/m³ at 21°C and 760 mm Hg (barometric pressure).

Static Pressure (Pa)

The Static pressure (of an air stream) is the force per unit area exerted in all directions, irrespective of the air flow direction. Can be positive or negative. Measured in pascals, perpendicular to the air flow direction.

Terminal Velocity (m/s)

The specific velocity in metres per second used to define the throw distance.

Throw (m)

The horizontal or vertical distance, in metres, that the air stream travels from the outlet face to where the specific terminal velocity occurs. Each Performance Data Chart states throw values in metres at the terminal velocities noted. Throw distances are based on isothermal air, for grilles/diffusers flush mounted in a wall, sill or ceiling. For grilles/diffusers, mounted on exposed ductwork, throws will be approximately 70% of performance data values.

Total Pressure (Pa)

The Total Pressure (of an air stream) equals the sum of its Static Pressure and its Velocity Pressure. Measured in pascals, parallel and counter to the air flow direction. Tabled values do not include allowance for Opposed Blade Dampers (OBDs), except Series 5180.

Velocity (Dynamic) Pressure (Pa)

The Velocity pressure (of an air stream) is the force per unit area equivalent to the transformation of the kinetic energy into pressure energy. Always positive. Obtained from the difference between Total and Static pressure.

Volume (l/s)

Volume of air per unit of time (flow rate) entering or leaving the grille or diffuser. Measured in litres per second.

GRILLES & DIFFUSERS

Noise Criteria (Sound)

The information presented below is included to assist in the design and/or selection of air distribution equipment for the intended end-use environment. 'NC' curves are shown, together with the suggested design goal NC range table.

The NC levels in the performance data tables are for the grille/diffuser alone, and assume a room attenuation of 10 dB across the octave band spectrum with a single outlet operating. Upstream duct-generated noise is not considered in the data. By selecting grille/diffuser sizes in accordance with the performance data tables and at the appropriate NC level, there will be no significant contribution to the overall system sound levels by the grille/diffuser. All data presented is in accordance with international standards, i.e. SWL re: 10-12 watts.

Sound level measurements, taken in a calibrated reverberant room, can be read directly as Sound Power Levels (SWL) in decibels (dB) whereas measurements taken in the installed environment are Sound Pressure Levels (SPL) in decibels (dB) which can be plotted on the NC curves.

By utilising the NC curves and NC range table, compliance with the design goal can be confirmed by:

- (i) predicting the Sound Pressure Levels (SPL) which can be calculated from published Sound Power Level (SWL) data and specified room characteristics,
- (ii) measuring Sound Pressure Levels (SPL) directly in an existing installation - preferably using an octave band sound pressure level meter.


Where measurements cannot be carried out with an octave-band sound level meter, an approximation of an NC level can be calculated from an 'A' scale sound level meter reading, as follows:

$$\text{NC Level} = \text{'A' scale reading in dB } 6 \pm 2$$

Guide for Environmental Sound Level Design

Suggested Environment	NC Range
Broadcast, Recording Studios	15 - 20
Concert / Opera Halls	20 - 25
Residences, Bedrooms	25 - 35
Hospitals	25 - 35
Theatres, Halls, Churches	25 - 30
Cinemas	30 - 35
Private Offices, Libraries	30 - 35
Restaurants, Bars	35 - 45
Retail Stores & Shops	35 - 45
General Offices, Schools	35 - 45
Swimming Centres, Gymnasiums	35 - 50
Kitchens	40 - 50
Factories	
- Light Engineering	45 - 65
- Heavy Engineering	55 - 75

NC Curves

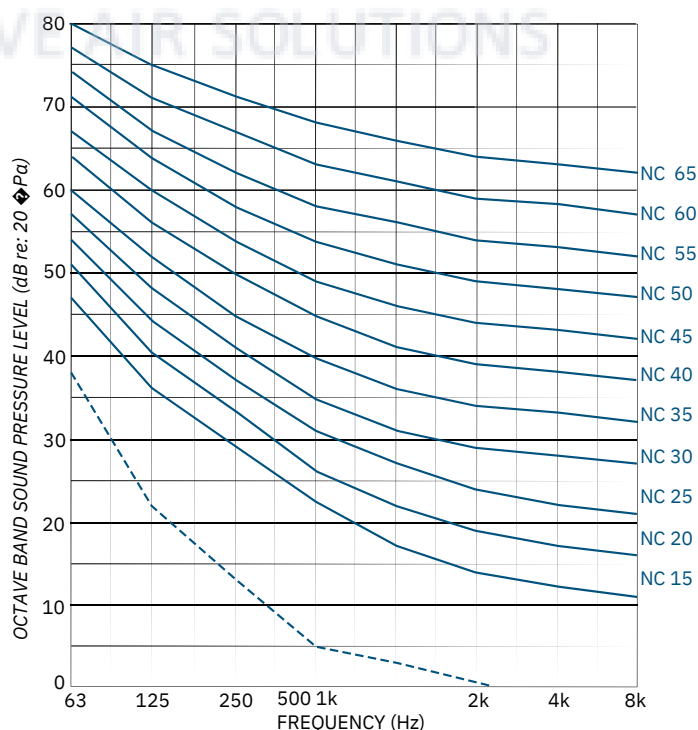

For more specific information on allowable noise levels, consult the latest issue of 'ASHRAE Guide and Data Book - Fundamentals and Equipment'.

SUGGESTED SPECIFICATIONS

Single-Deflection Grille - Series 580, 585

All side wall supply air grilles shall have individually adjustable deflection vanes for 'single' deflection air pattern control. Frames and vanes shall be of aluminium alloy sections, finished in commercial grade powder or stoving enamel coating all as manufactured by **temperzone** Limited. Where grilles (registers) are fitted with opposed blade volume regulating dampers (OBD), the adjustment lever shall be accessible from the register face.




ECOVENT AIR SYSTEMS
INNOVATIVE AIR SOLUTIONS

ACCESSORIES


Opposed Blade Damper (OBD)

- Controls air volume for balancing and fine adjustment
- Installs directly to neck with clip fasteners
- Lever operated from the face of the grille/diffuser
- Not intended for use as a shut-off damper
- Aluminium construction
- Sized to suit grilles/diffusers

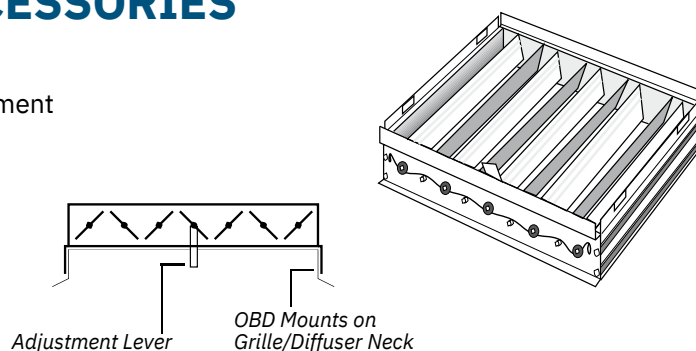

Square to Round Adaptor (SRA)

- Adapts square neck grilles/diffusers to round flexible or rigid ducting - Black Satin enamel finish on inside surfaces
- Galvanised steel construction; black polyethylene construction for size 300 sq. to 200/250 round
- Sized to suit grilles/diffusers and ducting



ECOVENT AIR SYSTEMS
INNOVATIVE AIR SOLUTIONS